

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE


In re the Application of: Kenshin Kitoh and Hiroshi Nemoto

Serial No.: Continuation of Application Ser. No. 09/169,563, filed October 9, 1998

Filed: October 15, 2001

For: LITHIUM SECONDARY BATTERY

Box Patent Application
Assistant Commissioner for Patents
Washington, DC 20231

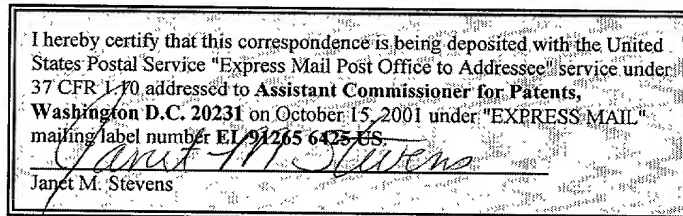

PRELIMINARY AMENDMENT

Sir:

Prior to examination, Applicants wish to amend the subject application as follows:

Attached hereto as Appendix A, pursuant to Rule 121(b)(3)(ii), is a substitute specification. Also attached hereto as Appendix B, pursuant to Rule 121(b)(3)(iii), is a marked-up copy of the original specification showing the changes made thereto. The substitute specification contains no new matter.

In the Claims:

Please add new claims 7-9 as follows:

7. (New) A lithium secondary battery comprising:

a battery case made solely of a single pipe;

an internal electrode body contained in the battery case and including a positive electrode, a negative electrode, and a separator made of porous polymer, the positive electrode and the negative electrode being wound or laminated through the separator so that the positive electrode and the negative electrode are not brought into direct contact with each other; and

first and second disks, whereby an outer structure comprising said disks and said battery case air-tightly encloses an entirety of a space defined within said outer structure, said internal electrode body and said electrolyte being within said space;

wherein said battery case is composed of pure aluminum or aluminum alloy containing one or more components selected from manganese, magnesium, silicon and copper, and wherein a relationship of $0.004 \leq t/d \leq 0.04$ is established where said battery case is cylindrical, its outer diameter is d (mm), and its wall thickness is t (mm).

8. (New) A lithium secondary battery according to claim 7, wherein said positive active material comprises lithium-manganese oxide (LiMn_2O_4).

9. (New) A lithium secondary battery according to claim 8, wherein said positive active material further comprises acetylene black.

Please cancel claims 1-6 without prejudice or disclaimer.

REMARKS

Claims 7-9 are pending herein.

If the Examiner believes that contact with applicant's attorney would be advantageous toward the disposition of this case, he is herein requested to call applicant's attorney at the phone number noted below.

The Commissioner is hereby authorized to charge any additional fees associated with this communication or credit any overpayment to Deposit Account No. 50-1446.

Respectfully submitted,

October 15, 2001

Date



Kevin C. Brown

Reg. No. 32,402

KCB:jms

BURR & BROWN
P.O. Box 7068
Syracuse, NY 13261-7068

Customer No.: 025191
Telephone: (315) 233-8300
Facsimile: (315) 233-8320

SUBSTITUTE SPECIFICATION
Appendix A

Title of the Invention

LITHIUM SECONDARY BATTERY

Cross Reference to Related Application

This is a continuation application of U.S. Application Serial No. 09/169,563, filed October 9, 1998, now allowed, the entirety of which is incorporated herein by reference.

Background of the Invention and Related Art Statement

The present invention relates to a lithium secondary battery which is superior in safety, and has high weight energy density (energy stored per unit weight, hereinafter called "energy density"), and which is suitably used for, particularly, an electric vehicle.

In recent years, the lithium secondary battery is being rapidly and widely used to realize a small power source for portable electronic equipment. In addition, effort of development is being also made to realize practical use of the lithium secondary battery as a motor driving battery for an electric vehicle which replaces a gasoline-powered vehicle, and as a battery for storing electric power in the night.

The structure of lithium secondary battery is roughly divided into a wound type shown in Fig. 2 and a laminated type shown in Fig. 3. An internal electrode body 1 of the wound type is constituted by winding a positive electrode 2 and a negative electrode 3 through a separator 4, in which the positive electrode 2 with a large area or the like can be contained in a tubular container. In the case of this wound type, since it is sufficient that there is at least one lead 5 from each electrode 2, 3, and, even if it is desired to lower current collection resistance of each electrode 2, 3, it is sufficient to increase the number of leads, there is an advantage that the internal structure of the battery does not become complicated to make for easy assembly of the battery.

On the other hand, an internal electrode body 7 of the laminated type is constructed by alternately laminating positive electrodes 8 and negative electrodes 9 in multiple layers through separators 10, in which area per one positive electrode 8 or the like is not large, but the electrode area of the entire battery can be increased by laminating them in multiple layers. The internal electrode body 7 being produced can be designed into any desired shape including a rectangular parallelepiped, cylindrical or tubular shape depending on the shape of each electrode 8, 9 and the

SUBSTITUTE SPECIFICATION

Appendix A

number of laminations. However, since a lead 6 is necessary for each electrode 8, 9, there is a disadvantage that the internal structure of the battery becomes complicated, and it is inferior to the wound type in view of assembly workability of the battery.

In both the wound and laminated type structures, the internal electrode body is housed in a metal battery case so that each electrode and lead do not contact each other. Conventionally, stainless steel is most widely used for this battery case, and sometimes nickel, titanium or the like may be used.

However, since stainless steel and nickel have higher specific gravities, there is a disadvantage that, when used for the battery case, the battery itself becomes heavy, so that the energy density is low. On the other hand, while titanium has an advantage to have lower specific gravity than stainless steel or nickel, and to be excellent in corrosion resistance, it is expensive, and its use is limited to a specific application such as space development, so that it is difficult to be used as a general purpose battery component. In addition, in the lithium secondary battery, the battery case itself is often used as a current path for the positive or negative electrodes, and such material has high electric resistance, leading to a cause of power loss. In addition, such metal is not always said to have good workability as the battery case.

Under such circumstances, a lithium secondary battery for an electric vehicle (EV) or hybrid electric vehicle (HEV) is required to have a cell capacity of at least 50 Wh, to be light enough so as not to increase the weight of the vehicle itself, and to have high safety. To meet such requirements, stainless steel having a high melting point and high strength has been conventionally used by particularly taking safety into consideration. However, as described earlier, it is difficult to solve the problem for reducing weight of the battery. In addition, EV and HEV require a high current in acceleration, and, when the battery case is used as the current path, magnitude of electric resistance of the battery case cannot be ignored, and there remains a problem on workability of the battery case when the size is increased. Also, when nickel or titanium is used, such problems are also difficult to be solved because of physical characteristics of these materials.

Then, to solve such problems, the inventors have studied the possibility to use aluminum as the battery case which has light weight, is excellent in electron conductivity, and of

SUBSTITUTE SPECIFICATION

Appendix A

good workability. There is no precedent to use aluminum as a battery case for a large battery of 50 Wh or more. This may be because the melting point of aluminum is as relatively low as 660°C, a temperature significantly lower than those of the above materials, and, when the battery case is softened or melted due to erroneous use or the like, it is feared that the electrolyte will evaporate or burn, or explode in the worst case.

According to Battery Association of Japan, as the "Guideline for Safety Evaluation on Secondary Lithium Cells" (commonly called "SBA Guideline"), it regulates that even if the entire energy fully charged is instantaneously discharged by an external short-circuit or an internal short-circuiting caused by a nail piercing test or the like, and then the lithium secondary battery generates heat, the battery does not burst or burn.

While such safety is strictly required, the inventors found that, even when an aluminum battery case is used, the problems on safety could be solved by accurately measuring temperature rise on the surface of the battery to calculate specific heat of the battery, and identifying the relationship between battery capacity and weight, and that reduction of energy density could be prevented by optimizing the battery case shape, and thus reached the present invention.

Summary of the Invention

That is, according to the present invention, there is provided a lithium secondary battery comprising:

a battery case, and

an internal electrode body contained in the battery case and including a positive electrode, a negative electrode, and a separator made of porous polymer, the positive electrode and the negative electrode being wound or laminated through the separator so that the positive electrode and the negative electrode are not brought into direct contact with each other;

wherein the battery case is composed of pure aluminum or aluminum alloy in which one or more components selected from manganese, magnesium, silicon and copper is added to the aluminum.

In addition, in the lithium secondary battery of the present invention, it is preferable in

SUBSTITUTE SPECIFICATION

Appendix A

view of assuring safety of the battery that a relationship of $C/(w \cdot c) \leq 0.03$ is established where current capacity is C (Ah), battery weight is w (kg), and specific heat of the battery is c (W/kg \cdot °C). It is also preferable in view of attaining both high energy density and safety that a relationship of $0.004 \leq t/d \leq 0.04$ is established where the battery case is cylindrical, its outer diameter is d (mm ϕ), and its wall thickness is t (mm). Moreover, such conditions are preferably applied to a lithium secondary battery with a battery capacity of 50 Wh or more. The lithium secondary battery satisfying such conditions is suitably used as a battery for an electric vehicle or a hybrid electric vehicle. With this regard, the lithium secondary battery of the present invention preferably uses lithium-manganese oxide (LiMn_2O_4) as the positive active material.

As described above, the lithium secondary battery of the present invention reduces weight of the battery case while assuring high safety, so that it has a high energy density.

Brief Description of the Drawings

Fig. 1 is a sectional view showing a structure at the end of a lithium secondary battery produced according to an embodiment.

Fig. 2 is a perspective view showing a structure of a wound-type internal electrode body.

Fig. 3 is a perspective view showing a structure of a laminated-type internal electrode body.

Detailed Description of the Preferred Embodiment

Now, embodiments of the present invention will be described, but the present invention is not limited to these embodiments.

In the lithium secondary battery of the present invention, an internal electrode body is composed by winding or laminating positive and negative electrodes through separator films of porous polymer such that the positive electrodes do not directly contact the negative electrodes. Specifically, it includes structures shown in Figs. 2 and 3, that is, internal electrode bodies 1 and

SUBSTITUTE SPECIFICATION

Appendix A

7.

The positive electrode used is an aluminum foil applied with a mixture of positive active material and carbon powder to improve conductivity. As the positive active material, there can be used, for example, lithium-cobalt oxide (LiCoO_2), lithium-nickel oxide (LiNiO_2), or lithium-manganese oxide (LiMn_2O_4). The present invention preferably uses LiMn_2O_4 . In addition, as the carbon powder, there can be used, for example, acetylene black, graphite powder or the like. It is preferable to use a high purity material for the aluminum foil constituting the positive electrode to prevent the battery performance from lowering due to corrosion by an electrochemical reaction of the battery.

On the other hand, for the negative electrode it is preferable to use a copper foil coated with an amorphous carbon material such as soft carbon or hard carbon, or carbon powder such as natural graphite as the negative active material. Here, similarly to the aluminum foil used for the positive electrode, it is preferable to use a high purity material for the copper foil used as the negative electrode to withstand the corrosion due to an electrochemical reaction.

When the above-mentioned carbon material is used for the negative electrode, it is known that a part of the lithium ions adsorbed to the carbon material at the initial charging reaction of the battery becomes the so-called dead lithium which is kept adsorbed to the carbon material and does not contribute to the subsequent charging and discharging reactions, so that the capacity of the battery is lowered. Thus, it is preferable to select a material in which the amount of the dead lithium is small as the carbon material for the negative active material.

As a material of the separator film, it is preferable to use a three-layer structural material in which a polyethylene film having lithium ion permeability and including micropores is sandwiched between porous polypropylene films having lithium ion permeability. This serves also as a safety mechanism in which when the temperature of the internal electrode body is raised, the polyethylene film is softened at about 130°C so that the micropores are collapsed to suppress the movement of lithium ions, that is, the battery reaction. When the polyethylene film is sandwiched between the polypropylene films having a softening temperature higher than the polyethylene film, it is possible to prevent the contact between the positive and negative electrodes even after softening of polyethylene.

SUBSTITUTE SPECIFICATION

Appendix A

The internal electrode body produced using such material is housed in the battery case. The present invention uses a battery case composed of pure aluminum or aluminum alloy in which one or more components selected from manganese, magnesium, silicon and copper is added to the aluminum. Here, pure aluminum does not refer to aluminum with 100% purity, but may contain impurities which are unavoidably mixed during an ordinary refining or manufacturing process, and, more specifically, the purity is preferably 99% or more. In addition, as for the aluminum alloy, it does not mean that impurities unavoidably mixed during an ordinary manufacturing process are not similarly excluded from aluminum which is the main component. Specific examples of aluminum alloy include alloy No. 3203 (aluminum-manganese alloy) prescribed in JIS.

Here, the aluminum battery case means that a main portion of the battery case, that is, a container into which the internal wound body is inserted for storage is made of aluminum, and a sealing member for sealing an opening of the battery case is not necessarily made of aluminum. For example, when the internal electrode body is a cylindrical wound body shown in Fig. 2, it is sufficient that at least a cylindrical container opened at both ends, or a bottomed cylindrical container opened at only one end is made of aluminum. When the internal electrode body is a rectangular parallelepiped laminated body shown in Fig. 3, as long as at least a tubular container with a rectangular section or a rectangular parallelepiped box-like container opened only at one side is made of aluminum, it is preferably used for the present invention.

The reason why the opening or the like through which the internal electrode body is inserted is excluded from the battery case lies in that the sealing member for sealing the opening of the battery case is sometimes preferably constituted by an insulating material such as heat resistance resin or ceramics for the purpose of installing an external terminal for taking out electric energy from the internal electrode body or isolating an electric path of the positive and negative electrodes within the battery. Of course, the above example does not exclude a battery case which can be entirely composed of aluminum for the outer shell of the battery by disposing insulating materials at appropriate locations to assure electric paths for the positive and negative electrodes, and using an aluminum part for the sealing member.

Then, the battery is produced by the internal electrode body, the battery case and other

SUBSTITUTE SPECIFICATION

Appendix A

necessary members such as electrode terminals. In this case, as for the structure for the battery being produced, it may be possible to adopt a structure which is a structure of a known small battery enlarged as it is. In addition, the inventors have proposed in Japanese Patent Application No. 9-202963 a structure of a lithium secondary battery in which various pressure releasing mechanisms are disposed at appropriate locations, and such structure may be preferably employed. Moreover, the battery thus produced preferably has at least one pressure release valve which releases the battery internal pressure to the ambient air pressure when the battery internal pressure rises and reaches a predetermined pressure due to erroneous use of the battery or the like, thereby preventing explosion due to a rise of internal pressure of the battery.

According to the present invention, where current capacity of the battery produced by using the aluminum battery case is C (Ah), the battery weight is w (kg), and the specific heat of the battery is c (W/kg \cdot $^{\circ}$ C), the battery is preferably designed such that a relationship of $C/(w\cdot c) \leq 0.03$ is established. Here, the specific heat c of battery is defined to be power (W) necessary for raising temperature of a battery of 1 kg by 1 $^{\circ}$ C. Therefore, even if the same battery case is used in producing the battery, the battery has a different specific heat if components other than the battery case differ, while, even if the volume of the battery is the same, the battery has different specific heat depending on the material and wall thickness of the battery case, the size of internal electrode body or the like.

However, when the construction conditions are established to assure safety even if all energy which the battery can store is used to raise temperature of the battery, that is, the battery is arranged such that the relationship of $C/(w\cdot c) \leq 0.03$ is established, it is possible to obtain a battery in which temperature rise due to generated heat does not cause softening or melting of the battery case, and which can clear the safety criteria of the SBA Guideline even if the energy charged in the battery is instantaneously discharged as external short-circuiting is caused or as internal short-circuiting is caused by the nail piercing test.

In addition, it is preferable in the present invention that the relationship of $0.004 \leq t/d \leq 0.04$ is established where the battery case is cylindrical, the outer diameter of the battery case is d (mm ϕ), and the wall thickness is t (mm). For example, in the case where the battery case has a thin wall thickness t when the outer diameter d of the battery case is constant, that is, the value of

SUBSTITUTE SPECIFICATION

Appendix A

t/d is small, the energy density of the battery increases since the weight of battery case is reduced as the battery capacity is increased, and there arises a problem in safety since the strength of battery case is lowered. On the other hand, in the case where the battery case has a thick wall thickness t , that is the value of t/d is large, it is desirable from the viewpoint of safety since the strength of battery case is heightened, but there arises a problem that the energy density is reduced as a whole since the weight of the battery case is increased, and the battery capacity is also reduced.

Thus, when the battery is arranged to have a ratio of the outer dimension of battery case to the wall thickness in a specific range, it becomes possible to assure safety while maintaining the energy density of the battery at a proper high value.

In the case where the battery case is a rectangular parallelepiped, the above relationship can be analogously applied by assuming that the outer diameter of a circle having the same area as the section perpendicular in the longitudinal direction is the outer diameter d of the battery case.

As described earlier, the present invention is attained as the result of a study mainly on the possibility of use of an aluminum battery case for a battery with large capacity which has not been produced, and the technical features of the present invention are suitably employed in a lithium secondary battery having battery capacity of 50 Wh or more. However, it is needless to say that there is no problem to employ the structure of battery with large capacity for which the safety criteria are strict as above for a battery with smaller capacity.

Thus, the battery with large capacity per unit cell produced by using a battery case composed of aluminum has excellent advantages that the battery has lighter weight, and that it has higher energy density. When compared with a case where a plurality of batteries with small capacity are connected to obtain a battery with equivalent capacity, contact resistance due to battery connection can be reduced as the number of series/parallel connections is reduced in the battery, and mounting space for the battery can be saved. Therefore, the lithium secondary battery of the present invention is suitable in applications such as the power supply for an electric or hybrid electric vehicle or as power supply for various mobile equipment.

SUBSTITUTE SPECIFICATION

Appendix A

Examples

Now, examples of lithium secondary battery according to the present invention are described, but it is needless to say that the present invention is not limited to these examples.

First, description is given of members commonly used for the examples and the battery structure. The positive electrode was formed of an aluminum foil coated with a mixture in which carbon powder (acetylene black) for improving the conductivity was added to lithium-manganese oxide (LiMn_2O_4) as a positive active material. The negative electrode was formed of a copper foil coated with graphite powder. As a separator for separating the positive electrode from the negative electrode, a microporous separator made of polypropylene was used. The electrolyte was prepared by dissolving an LiPF_6 electrolyte in a mixed solution of ethylene carbonate (EC) and diethyl carbonate (DEC). The battery was a cylindrical type which was formed by inserting a cylindrical internal electrode body, in which the positive and negative electrodes were wound through the separator, into a cylindrical battery case, both ends of the case being sealed with a structure shown in Fig. 1.

Here, in Fig. 1, a lead 32 for electricity collection connected to either one of the positive or negative electrode (not shown) was connected to a metal rivet 33 as an internal terminal mounted on a disk 34 for sealing a battery case 39. Then, the disk 34 was provided with a pressure release valve 35 which was burst when the internal pressure of the battery reached a predetermined pressure, and crimped onto the battery case 39 through ethylene propylene rubber 38 so that an external terminal 37 was electrically connected to the disk 34 through a metal ring 36, and that the disk 34, the metal ring 36 and the external terminal 37 were electrically insulated from the battery case. Thus, there was formed a battery of cylindrical type with both terminals in which the external terminal for either one of the positive or negative electrode was disposed on one end of the battery case 39.

Test for selecting battery case material

Then, batteries in the battery size of outer diameter 50 mm ϕ and length 245 mm and having the above-mentioned structure were formed by using battery cases with an outer diameter of 50 mm and a wall thickness of 1 mm composed of various materials listed in Table 1, and the energy density of each battery was measured. Here, aluminum alloy was aluminum added with

SUBSTITUTE SPECIFICATION

Appendix A

manganese, while SUS-304 was used as stainless steel. In addition, the disk 34 for sealing the end of battery case 39 was made of the same material as the battery case 39, and the area of the electrode was made equal so that capacity of all batteries became 100 Wh.

Table 1

	Battery Case material	Energy density (Wh/kg)
Example 1	Aluminum	116
Example 2	Aluminum alloy	115
Comparative Example 1	Stainless Steel	94
Comparative Example 2	Nickel	89
Comparative Example 3	Titanium	107

The energy densities of the produced batteries are also listed in Table 1. It is significant that a battery case material with higher density tends to provide lower resultant energy density. That is, in the case of comparative example 2 where nickel with the highest density was used as the battery case material, the energy density was the lowest of 89 Wh/kg, and the energy density became higher as the density of battery case material decreased in the order of stainless steel (comparative example 1), titanium (comparative example 3), and aluminum (examples 1 and 2). Examples 1 and 2 using aluminum according to the present invention provided energy density of about 115 Wh/kg. Since the energy density was 94 Wh/kg for comparative example 1 using stainless steel which had been generally used as the battery case material, the characteristic of energy density was improved by about 20% by using aluminum or aluminum alloy for the battery case. Examples 1 and 2 were believed to have similar energy density because there was no significant difference in density between aluminum and aluminum alloy. In addition, in this test, since the battery case was not used as a current path, and distance was very short between the lead connected to the disk for sealing the battery case and the external terminal, impact on the energy density due to difference of conductivity of the battery case materials (disk for sealing the battery case) used can be ignored.

Test for identifying battery case shape

Effectiveness in using aluminum for the battery case was demonstrated from the result

SUBSTITUTE SPECIFICATION

Appendix A

of the test for selecting battery case material described above. Then, batteries were produced with various wall thickness t by using aluminum for the battery case, fixing the outer diameter d of the battery case to 50 mm, and length of the battery to 245 mm, and varying the wall thickness t (mm) in view of improvement of energy density and securing of safety, and measured for energy density and bulging (deformation) of the battery case after completing 100 charging/discharging cycles with discharging rate of 0.2C and depth of discharge (D.O.D.) 100%. Table 2 lists values of t/d and results of the produced battery cases.

Table 2

	t/d	Energy density (Wh/kg)	Bulging after 100 cycles (mm)
Comparative Example 4	0.002	141	>0.5
Example 3	0.004	137	0.2
Example 4	0.01	130	0.1
Example 5	0.02	117	<0.1
Example 6	0.04	101	0.0
Comparative Example 5	0.06	82	0.0
Comparative Example 6	0.1	57	0.0

Although the outer diameter of battery case is fixed, since the inner diameter of battery case is reduced as the wall thickness of battery case is thickened, the size of internal electrode body which can be housed in the battery case is reduced, that is, the area of electrodes is made small, so that the absolute value of battery capacity is decreased. In addition, as the wall thickness of battery case is thickened, ratio of the battery case to the weight of entire battery is increased. This increases the value of t/d as listed in Table 2. That is, as the wall thickness of battery case is thickened, the energy density significantly tends to decrease.

Here, since comparative example 4 has as small t/d as 0.002, it had a light battery case, and very high energy density of about 140 Wh/kg. However, it has large bulging of the outer diameter of the battery case after the charging/discharging test of 100 cycles, and is found to have a problem in safety. On the other hand, comparative example 5 had as large t/d as 0.06, so that no deformation of battery case was observed after the charging/discharging test of 100 cycles, but it could not provide a desired energy density of 100 Wh/kg or more due to an increase of weight of the battery case and a decrease of volume of the internal electrode body which could

SUBSTITUTE SPECIFICATION

Appendix A

be housed in the battery case.

It is revealed from Table 2 that $0.004 \leq t/d \leq 0.04$ is preferable as the condition for assuring safety as well as output density of 100 Wh/kg, as shown in examples 3 through 6. In addition, the most preferable characteristic can be attained with bulging suppressed to as low as 0.1 mm or less while maintaining high energy density by making $0.01 \leq t/d \leq 0.02$.

Test for measuring specific heat of battery

Then, specific heat was measured on example 5 which had the value of t/d of 0.02 or the wall thickness of 1 mm, which was believed to be preferable from the viewpoint of the energy density and safety in the above-mentioned test for identifying shape of battery case. The specific heat was measured by attaching a T-type thermocouple at the longitudinal center of side of battery, discharging the battery at a current of 27 A to 2.5 V in a 25°C constant temperature bath after constant current charging at 10 A and constant voltage charging at 4.1 V (6 hours in total), and measuring temperature rise of the battery. As a result, temperature rise was 6°C. Assuming that all heat generation from the battery when it is discharged is caused by internal resistance of the battery, since the internal resistance of battery was 4 mΩ, total power consumption in discharge (resistance \times (current)² \times discharging time) was 8923 W. Therefore, for battery weight of 0.86 kg and temperature rise of 6°C, the specific heat of battery was calculated as 1729 W/kg•°C.

When all energy (100 Wh) of this battery was assumed to be instantaneously discharged from the full charged state due to external short-circuiting caused by erroneous use or internal short-circuiting, since 100 Wh corresponded to 360000 W (100 \times 3600 seconds), when this value is divided by the weight and specific heat of the battery, the temperature rise of the battery was calculated as 242°C, and it was found that the highest temperature reached was lower than the melting point of 660°C of aluminum. Then, when the external short-circuiting test was conducted in a state where the battery was actually fully charged, the pressure release valve was actuated but there was caused no burst or firing, so that safety of the battery was confirmed to be assured.

Internal and external short-circuiting tests

Batteries having various $C/(w \cdot c)$ values as shown in Table 3 were produced using an

SUBSTITUTE SPECIFICATION

Appendix A

aluminum battery case by noticing the parameter of $C/(w \cdot c)$ consisting of the battery capacity C (Ah), the battery weight w (kg), and the specific heat c of battery ($W/kg \cdot ^\circ C$) calculated with the above method based on the result of the test for measuring specific heat of battery, and subjected to the nail piercing test (internal short-circuiting test) according to the SBA Guideline. Table 3 also lists the test results.

Table 3

	$C/(w \cdot c)$	Situation after test	Evaluation
Example 7	0.015	Pressure release valve actuated; no burst nor firing	O good
Example 8	0.018	Pressure release valve actuated; no burst nor firing	O good
Example 9	0.03	Pressure release valve actuated; no burst nor firing	O good
Comparative Example 7	0.035	Pressure release valve actuated; burst and firing occurred	X no good

As listed in Table 3, in the case of examples 7-9 with $C/(w \cdot c)$ value of 0.03 or less, although the pressure release valve was activated, no significant change of shape was observed due to softening or melting of the battery case. However, in the case of comparative example 7 with $C/(w \cdot c)$ value of 0.035, the battery case was significantly deformed and partially cracked, and traces which were believed to indicate partial melting were observed. In addition, as for examples 7-9 and comparative example 7, when similar batteries were again produced, and subjected to the external short-circuiting test by short-circuiting the external terminal, there were provided the same results as the internal short-circuiting test shown in Table 3. From this, it was confirmed that the safety criteria prescribed in the SBA Guideline could be passed by making the $C/(w \cdot c)$ value 0.03 or less.

As described, according to the lithium secondary battery of the present invention, since it uses for the battery case aluminum which has lightweight and is excellent in conductivity, it has a very excellent advantage that the battery has light weight, and is significantly improved for the energy density than the prior art. Moreover, it is possible to provide a battery with excellent safety which can pass the criteria of SBA Guideline because the specific heat design of battery for the battery capacity and determination of shape of battery case are properly conducted.

SUBSTITUTE SPECIFICATION
Appendix A

Abstract of the Disclosure

A lithium secondary battery includes: a battery case, and an internal electrode body 1 contained in the battery case and including a positive electrode 2, a negative electrode 3, and a separator 4 made of porous polymer. The positive electrode and the negative electrode are wound and laminated through the separator so that the positive electrode and the negative electrode are not brought into direct contact with each other. The battery case is composed of pure aluminum or aluminum alloy in which one or more components selected from manganese, magnesium, silicon and copper is added in aluminum. The lithium secondary battery has high weight energy density, is superior in safety, and is used for, particularly, an electric vehicle.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197

**VERSION WITH MARKINGS TO SHOW CHANGES MADE
APPENDIX B**

Title of the Invention

LITHIUM SECONDARY BATTERY

Cross Reference to Related Application

This is a continuation application of U.S. Application Serial No. 09/169,563, filed October 9, 1998, now allowed, the entirety of which is incorporated herein by reference.

Background of the Invention and Related Art Statement

The present invention relates to a lithium secondary battery which is superior in safety, and has high weight energy density (energy stored per unit weight, hereinafter called "energy density"), and which is suitably used for, particularly, an electric vehicle.

In recent years, the lithium secondary battery is being rapidly and widely used to realize a small power source for portable electronic equipment. In addition, effort of development is being also made to realize practical use of the lithium secondary battery as a motor driving battery for an electric vehicle which replaces a gasoline-powered vehicle, and as a battery for storing electric power in the night.

The structure of lithium secondary battery is roughly divided into a wound type shown in Fig. 2 and a laminated type shown in Fig. 3. An internal electrode body 1 of the wound type is constituted by winding a positive electrode 2 and a negative electrode 3 through a separator 4, in which the positive electrode 2 with a large area or the like can be contained in a tubular container. In the case of this wound type, since it is sufficient that there is at least one lead 5 from each electrode 2, 3, and, even if it is desired to lower current collection resistance of each electrode 2, 3, it is sufficient to increase the number of leads, there is an advantage that the internal structure of the battery does not become complicated to make for easy assembly of the battery.

On the other hand, an internal electrode body 7 of the laminated type is constructed by alternately laminating positive electrodes 8 and negative electrodes 9 in multiple layers through separators 10, in which area per one positive electrode 8 or the like is ~~no~~not large, but the electrode area of the entire battery can be increased by laminating them in multiple layers. The internal electrode body 7 being produced can be designed into any desired shape including a rectangular parallelepiped, cylindrical or tubular shape depending on the shape of each electrode

VERSION WITH MARKINGS TO SHOW CHANGES MADE APPENDIX B

8, 9 and the number of laminations. However, since a lead 6 is necessary for each electrode 8, 9, there is a disadvantage that the internal structure of the battery becomes complicated, and it is inferior to the wound type in view of assembly workability of the battery.

In both the wound and laminated type structures, the internal electrode body is housed in a metal battery case so that each electrode and lead do not contact each other. Conventionally, stainless steel is most widely used for this battery case, and sometimes nickel, titanium or the like may be used.

However, since stainless steel ~~or and~~ nickel has have higher specific ~~gravity~~gravities, there is a disadvantage that, when ~~it is~~ used for the battery case, the battery itself becomes heavy, so that the energy density is low. On the other hand, while titanium has an advantage to have lower specific gravity than stainless steel or nickel, and to be excellent in corrosion resistance, it is expensive, and its use is limited to a specific application such as space development, so that it is difficult to be used as a general purpose battery component. In addition, in the lithium secondary battery, the battery case itself is often used as a current path for the positive or negative electrodes, and such material has high electric resistance, leading to a cause of power loss. In addition, such metal is not always said to have good workability as the battery case.

Under such circumstances, a lithium secondary battery for an electric vehicle (EV) or hybrid electric vehicle (HEV) is required to have a cell capacity of at least 50 Wh, to ~~have be~~ light enough so as weight not to increase the weight of the vehicle itself, and to have high safety. To meet such requirements, stainless steel ~~with having~~ a high melting point and high strength has been conventionally used by particularly taking safety into consideration. However, as described earlier, it is difficult to solve the problem for reducing weight of the battery. In addition, EV and HEV require a high current in acceleration, and, when the battery case is used as the current path, magnitude of electric resistance of the battery case cannot be ignored, and there remains a problem on workability of the battery case when the size ~~of which is~~ increased. Also, when nickel or titanium is used, such problems are also difficult to be solved because of physical characteristics of these materials.

Then, to solve such problems, the inventors have studied the possibility to use aluminum as the battery case which has light weight, is excellent in electron conductivity, and of

VERSION WITH MARKINGS TO SHOW CHANGES MADE
APPENDIX B

good workability. There is no precedent to use aluminum as a battery case for a large battery of 50 Wh or more. This may be because the melting point of aluminum is as relatively low as 660°C, a temperature significantly lower than those of the above materials, and, when the battery case is softened or melted due to erroneous use or the like, it is feared that the electrolyte is ~~feared to be will evaporated-evaporate or -burnedburn, or exploded-explode~~ in the worst case.

According to Battery Association of Japan, as the "Guideline for Safety Evaluation on Secondary Lithium Cells" (commonly called "SBA Guideline"), it regulates that even if the entire energy fully charged is instantaneously discharged by an external short-circuit or an internal short-circuiting caused by a nail piercing test or the like, and then the lithium secondary battery generates heat, the battery does not burst or ~~fire~~burn.

While such safety is strictly required, the inventors found that, even when an aluminum battery case is used, the problems on safety could be solved by accurately measuring temperature rise on the surface of the battery to calculate specific heat of the battery, and identifying the relationship between battery capacity and weight, and that reduction of energy density could be prevented by optimizing the battery case shape, and thus reached the present invention.

Summary of the Invention

That is, according to the present invention, there is provided a lithium secondary battery comprising:

a battery case, and

an internal electrode body contained in the battery case and including a positive electrode, a negative electrode, and a separator made of porous polymer, the positive electrode and the negative electrode being wound or laminated through the separator so that the positive electrode and the negative electrode are not brought into direct contact with each other;

wherein the battery case is composed of pure aluminum or aluminum alloy in which one or more components selected from manganese, magnesium, silicon and copper is added ~~in~~to the aluminum.

In addition, in the lithium secondary battery of the present invention, it is preferable in

VERSION WITH MARKINGS TO SHOW CHANGES MADE APPENDIX B

view of assuring safety of the battery that a relationship of $C/(w \cdot c) \leq 0.03$ is established where current capacity is C (Ah), battery weight is w (kg), and specific heat of the battery is c (W/kg \cdot° C). It is also preferable in view of attaining both high energy density and safety that a relationship of $0.004 \leq t/d \leq 0.04$ is established where the battery case is cylindrical, its outer diameter is d (mm ϕ), and its wall thickness is t (mm). Moreover, such conditions are preferably applied to a lithium secondary battery with a battery capacity of 50 Wh or more. The lithium secondary battery satisfying such conditions is suitably used as a battery for an electric vehicle or a hybrid electric vehicle. With this regard, the lithium secondary battery of the present invention preferably uses lithium-manganese oxide (LiMn_2O_4) as the positive active material.

As described above, the lithium secondary battery of the present invention reduces weight of the battery case while assuring high safety, so that it has a high energy density.

Brief Description of the Drawings

Fig. 1 is a sectional view showing a structure at the end of a lithium secondary battery produced according to an embodiment.

Fig. 2 is a perspective view showing a structure of a wound-type internal electrode body.

Fig. 3 is a perspective view showing a structure of a laminated-type internal electrode body.

Detailed Description of the Preferred Embodiment

Now, embodiments of the present invention will be described, but the present invention is not limited to these embodiments.

In the lithium secondary battery of the present invention, an internal electrode body is composed by winding or laminating positive and negative electrodes through separator films of porous polymer such that the positive electrodes do not directly contact the negative electrodes. Specifically, it includes structures shown in Figs. 2 and 3, that is, internal electrode bodies 1 and

**VERSION WITH MARKINGS TO SHOW CHANGES MADE
APPENDIX B**

7.

The positive electrode used is an aluminum foil applied with a mixture of positive active material and carbon powder to improve conductivity. As the positive active material, there can be used, for example, lithium-cobalt oxide (LiCoO_2), lithium-nickel oxide (LiNiO_2), or lithium-manganese oxide (LiMn_2O_4). The present invention preferably uses LiMn_2O_4 . In addition, as the carbon powder, there can be used, for example, acetylene black, graphite powder or the like. It is preferable to use a high a-purity material for the aluminum foil constituting the positive electrode to prevent the battery performance from lowering due to corrosion by an electrochemical reaction of the battery.

On the other hand, for the negative electrode it is preferable to use a copper foil coated with an amorphous carbon material such as soft carbon or hard carbon, or carbon powder such as natural graphite as the negative active material. Here, similarly to the aluminum foil used for the positive electrode, it is preferable to use a high purity material for the copper foil used as the negative electrode to withstand the corrosion due to an electrochemical reaction.

When the above-mentioned carbon material is used for the negative electrode, it is known that a part of the lithium ions adsorbed to the carbon material at the initial charging reaction of the battery becomes the so-called dead lithium which is kept adsorbed to the carbon material and does not contribute to the subsequent charging and discharging reactions, so that the capacity of the battery is lowered. Thus, it is preferable to select a material in which the amount of the dead lithium is small as the carbon material for the negative active material.

As a material of the separator film, it is preferable to use a three-layer structural material in which a polyethylene film having lithium ion permeability and including micropores is sandwiched between porous polypropylene films having lithium ion permeability. This serves also as a safety mechanism in which when the temperature of the internal electrode body is raised, the polyethylene film is softened at about 130°C so that the micropores are collapsed to suppress the movement of lithium ions, that is, the battery reaction. When the polyethylene film is sandwiched between the polypropylene films having a softening temperature higher than the polyethylene film, it is possible to prevent the contact between the positive and negative electrodes even after softening of polyethylene.

VERSION WITH MARKINGS TO SHOW CHANGES MADE
APPENDIX B

The internal electrode body produced using such material is housed in the battery case. The present invention uses a battery case composed of pure aluminum or aluminum alloy in which one or more components selected from manganese, magnesium, silicon and copper is added ~~in to~~ the aluminum. Here, pure aluminum does not refer to aluminum with 100% purity, but may contain impurities which are unavoidably mixed during an ordinary refining or manufacturing process, and, more specifically, the purity is preferably 99% or more. In addition, as for the aluminum alloy, it does not mean that impurities unavoidably mixed during an ordinary manufacturing process are not similarly excluded from aluminum which is the main component. Specific examples of aluminum alloy include alloy No. 3203 (aluminum-manganese alloy) prescribed in JIS.

Here, the aluminum battery case means that a main portion of the battery case, that is, a container into which the internal wound body is inserted for storage is made of aluminum, and a sealing member for sealing an opening of the battery case is not necessarily made of aluminum. For example, when the internal electrode body is a cylindrical wound body shown in Fig. 2, it is sufficient that at least a cylindrical container opened at both ends, or a bottomed cylindrical container opened at only one end is made of aluminum. When the internal electrode body is a rectangular parallelepiped laminated body shown in Fig. 3, as long as at least a tubular container with a rectangular section or a rectangular parallelepiped box-like container opened only at one side is made of aluminum, it is preferably used for the present invention.

The reason why the opening or the like through which the internal electrode body is inserted is excluded from the battery case lies in that the sealing member for sealing the opening of the battery case is sometimes preferably constituted by an insulating material such as heat resistance resin or ceramics for the purpose of installing an external terminal for taking out electric energy from the internal electrode body or isolating an electric path of the positive and negative electrodes within the battery. Of course, the above example ~~of battery case~~ does not exclude a battery case which can be entirely composed of aluminum for the outer shell of the battery by disposing insulating materials at appropriate locations to assure electric paths for the positive and negative electrodes, and using an aluminum part for the sealing member.

Then, the battery is produced by the internal electrode body, the battery case and other

VERSION WITH MARKINGS TO SHOW CHANGES MADE

APPENDIX B

necessary members such as electrode terminals. In this case, as for the structure for the battery being produced, it may be possible to adopt a structure which is a structure of a known small battery enlarged as it is. In addition, the inventors have proposed in Japanese Patent Application No. 9-202963 a structure of a lithium secondary battery in which various pressure releasing mechanisms are disposed at appropriate locations, and such structure may be preferably employed. Moreover, the battery thus produced preferably has at least one pressure release valve which releases the battery internal pressure to the ambient air pressure when the battery internal pressure rises and reaches a predetermined pressure due to erroneous use of the battery or the like, thereby preventing explosion due to a rise of internal pressure of the battery.

According to the present invention, where current capacity of the battery produced by using the aluminum battery case is C (Ah), the battery weight is w (kg), and the specific heat of the battery is c (W/kg•°C), the battery is preferably designed such that a relationship of $C/(w \cdot c) \leq 0.03$ is established. Here, the specific heat c of battery is defined to be power (W) necessary for raising temperature of a battery of 1 kg by 1°C. Therefore, even if the same battery case is used in producing the battery, the battery has a different specific heat if components other than the battery case differ, while, even if the volume of the battery is the same, the battery has different specific heat depending on the material and wall thickness of the battery case, the size of internal electrode body or the like.

However, when the construction conditions are established to assure safety even if all energy which the battery can store is used to raise temperature of the battery, that is, the battery is arranged such that the relationship of $C/(w \cdot c) \leq 0.03$ is established, it is possible to obtain a battery in which temperature rise due to generated heat does not cause softening or melting of the battery case, and which can clear the safety criteria of the SBA Guideline even if the energy charged in the battery is instantaneously discharged as external short-circuiting is caused or as internal short-circuiting is caused by the nail piercing test.

In addition, it is preferable in the present invention that the relationship of $0.004 \leq t/d \leq 0.04$ is established where the battery case is cylindrical, the outer diameter of the battery case is d (mmφ), and the wall thickness is t (mm). For example, in the case where the battery case has a thin wall thickness t when the outer diameter d of the battery case is constant, that is, the value of

VERSION WITH MARKINGS TO SHOW CHANGES MADE
APPENDIX B

t/d is small, the energy density of the battery increases since the weight of battery case is reduced as the battery capacity is increased, and there arises a problem in safety since the strength of battery case is lowered. On the other hand, in the case where the battery case has a thick wall thickness t , that is the value of t/d is large, it is desirable from the viewpoint of safety since the strength of battery case is heightened, but there arises a problem that the energy density is reduced as a whole since the weight of the battery case is increased, and the battery capacity is also reduced.

Thus, when the battery is arranged to have a ratio of the outer dimension of battery case to the wall thickness in a specific range, it becomes possible to assure safety while maintaining the energy density of the battery at a proper high value.

In the case where the battery case is a rectangular parallelepiped, the above relationship can be analogously applied by assuming that the outer diameter of a circle having the same area as the section perpendicular in the longitudinal direction is the outer diameter d of the battery case.

As described earlier, the present invention is attained as the result of a study mainly on the possibility of use of an aluminum battery case for a battery with large capacity which has not been produced, and the technical features of the present invention are suitably employed in a lithium secondary battery having battery capacity of 50 Wh or more. However, it is needless to say that there is no problem to employ the structure of battery with large capacity for which the safety criteria are strict as above for a battery with smaller capacity.

Thus, the battery with large capacity per unit cell produced by using a battery case composed of aluminum has excellent advantages that the battery has lighter weight, and that it has higher energy density. When compared with a case where a plurality of batteries with small capacity are connected to obtain a battery with equivalent capacity, contact resistance due to battery connection can be reduced as the number of series/parallel connections is reduced in the battery, and mounting space for the battery can be saved. Therefore, the lithium secondary battery of the present invention is suitable in applications such as the power supply for an electric or hybrid electric vehicle or as power supply for various mobile equipment.

Examples

VERSION WITH MARKINGS TO SHOW CHANGES MADE APPENDIX B

Now, examples of lithium secondary battery according to the present invention are described, but it is needless to say that the present invention is not limited to these examples.

First, description is given of members commonly used for the examples and the battery structure. The positive electrode was formed of an aluminum foil coated with a mixture in which carbon powder (acetylene black) for improving the conductivity was added to lithium-manganese oxide (LiMn_2O_4) as a positive active material. The negative electrode was formed of a copper foil coated with graphite powder. As a separator for separating the positive electrode from the negative electrode, a microporous separator made of polypropylene was used. The electrolyte was prepared by dissolving an LiPF_6 electrolyte in a mixed solution of ethylene carbonate (EC) and diethyl carbonate (DEC). The battery was a cylindrical type which was formed by inserting a cylindrical internal electrode body, in which the positive and negative electrodes were wound through the separator, into a cylindrical battery case, both ends of the case being sealed with a structure shown in Fig. 1.

Here, in Fig. 1, a lead 32 for electricity collection connected to either one of the positive or negative electrode (not shown) was connected to a metal rivet 33 as an internal terminal mounted on a disk 34 for sealing a battery case 39. Then, the disk 34 was provided with a pressure release valve 35 which was burst when the internal pressure of the battery reached a predetermined pressure, and crimped onto the battery case 39 through ethylene propylene rubber 38 so that an external terminal 37 was electrically connected to the disk 34 through a metal ring 36, and that the disk 34, the metal ring 36 and the external terminal 37 were electrically insulated from the battery case. Thus, there was formed a battery of cylindrical type with both terminals in which the external terminal for either one of the positive or negative electrode was disposed on one end of the battery case 39.

(Test for selecting battery case material)

Then, batteries in the battery size of outer diameter 50 mm ϕ and length 245 mm and having the above-mentioned structure were formed by using battery cases with an outer diameter of 50 mm and a wall thickness of 1 mm composed of various materials listed in Table 1, and the energy density of each battery was measured. Here, aluminum alloy was aluminum added with manganese, while SUS-304 was used as stainless steel. In addition, the disk 34 for sealing the

VERSION WITH MARKINGS TO SHOW CHANGES MADE
APPENDIX B

end of battery case 39 was made of the same material as the battery case 39, and the area of the electrode was made equal so that capacity of all batteries became 100 Wh.

{Table 1}

	Battery Case material	Energy density (Wh/kg)
Example 1	Aluminum	116
Example 2	Aluminum alloy	115
Comparative Example 1	Stainless Steel	94
Comparative Example 2	Nickel	89
Comparative Example 3	Titanium	107

The energy densities of the produced batteries are also listed in Table 1. It is significant that a battery case material with higher density tends to provide lower resultant energy density. That is, in the case of comparative example 2 where nickel with the highest density was used as the battery case material, the energy density was the lowest of 89 Wh/kg, and the energy density became higher as the density of battery case material decreased in the order of stainless steel (comparative example 1), titanium (comparative example 3), and aluminum (examples 1 and 2). Examples 1 and 2 using aluminum according to the present invention provided energy density of about 115 Wh/kg. Since the energy density was 94 Wh/kg for comparative example 1 using stainless steel which had been generally used as the battery case material, the characteristic of energy density was improved by about 20% by using aluminum or aluminum alloy for the battery case. Examples 1 and 2 were believed to have similar energy density because there was no significant difference in density between aluminum and aluminum alloy. In addition, in this test, since the battery case was not used as a current path, and distance was very short between the lead connected to the disk for sealing the battery case and the external terminal, impact on the energy density due to difference of conductivity of the battery case materials (disk for sealing the battery case) used can be ignored.

{Test for identifying battery case shape}

Effectiveness in using aluminum for the battery case was demonstrated from the result of the test for selecting battery case material described above. Then, batteries were produced

VERSION WITH MARKINGS TO SHOW CHANGES MADE
APPENDIX B

with various wall thickness t by using aluminum for the battery case, fixing the outer diameter d of the battery case to 50 mm, and length of the battery to 245 mm, and varying the wall thickness t (mm) in view of improvement of energy density and securing of safety, and measured for energy density and bulging (deformation) of the battery case after completing 100 charging/discharging cycles with discharging rate of 0.2C and depth of discharge (D.O.D.) 100%. Table 2 lists values of t/d and results of the produced battery cases.

Table 2

	t/d	Energy density (Wh/kg)	Bulging after 100 cycles (mm)
Comparative Example 4	0.002	141	>0.5
Example 3	0.004	137	0.2
Example 4	0.01	130	0.1
Example 5	0.02	117	<0.1
Example 6	0.04	101	0.0
Comparative Example 5	0.06	82	0.0
Comparative Example 6	0.1	57	0.0

Although the outer diameter of battery case is fixed, since the inner diameter of battery case is reduced as the wall thickness of battery case is thickened, the size of internal electrode body which can be housed in the battery case is reduced, that is, the area of electrodes is made small, so that the absolute value of battery capacity is decreased. In addition, as the wall thickness of battery case is thickened, ratio of the battery case to the weight of entire battery is increased. This increases the value of t/d as listed in Table 2. That is, as the wall thickness of battery case is thickened, the energy density significantly tends to decrease.

Here, since comparative example 4 has as small t/d as 0.002, it had a light battery case, and very high energy density of about 140 Wh/kg. However, it has large bulging of the outer diameter of the battery case after the charging/discharging test of 100 cycles, and is found to have a problem in safety. On the other hand, comparative example 5 had as large t/d as 0.06, so that no deformation of battery case was observed after the charging/discharging test of 100 cycles, but it could not provide a desired energy density of 100 Wh/kg or more due to an increase of weight of the battery case and a decrease of volume of the internal electrode body which could be housed in the battery case.

VERSION WITH MARKINGS TO SHOW CHANGES MADE

APPENDIX B

It is revealed from Table 2 that $0.004 \leq t/d \leq 0.04$ is preferable as the condition for assuring safety as well as output density of 100 Wh/kg, as shown in examples 3 through 6. In addition, the most preferable characteristic can be attained with bulging suppressed to as low as 0.1 mm or less while maintaining high energy density by making $0.01 \leq t/d \leq 0.02$.

{Test for measuring specific heat of battery}

Then, specific heat was measured on example 5 which had the value of t/d of 0.02 or the wall thickness of 1 mm, which was believed to be preferable from the viewpoint of the energy density and safety in the above-mentioned test for identifying shape of battery case. The specific heat was measured by attaching a T-type thermocouple at the longitudinal center of side of battery, discharging the battery at a current of 27 A to 2.5 V in a 25°C constant temperature bath after constant current charging at 10 A and constant voltage charging at 4.1 V (6 hours in total), and measuring temperature rise of the battery. As a result, temperature rise was 6°C. Assuming that all heat generation from the battery when it is discharged is caused by internal resistance of the battery, since the internal resistance of battery was 4 mΩ, total power consumption in discharge (resistance \times (current)² \times discharging time) was 8923 W. Therefore, for battery weight of 0.86 kg and temperature rise of 6°C, the specific heat of battery was calculated as 1729 W/kg•°C.

When all energy (100 Wh) of this battery was assumed to be instantaneously discharged from the full charged state due to external short-circuiting caused by erroneous use or internal short-circuiting, since 100 Wh corresponded to 360000 W (100 \times 3600 seconds), when this value is divided by the weight and specific heat of the battery, the temperature rise of the battery was calculated as 242°C, and it was found that the highest temperature reached was lower than the melting point of 660°C of aluminum. Then, when the external short-circuiting test was conducted in a state where the battery was actually fully charged, the pressure release valve was actuated but there was caused no burst or firing, so that safety of the battery was confirmed to be assured.

{Internal and external short-circuiting tests}

Batteries having various $C/(w \cdot c)$ values as shown in Table 3 were produced using an aluminum battery case by noticing the parameter of $C/(w \cdot c)$ consisting of the battery capacity C

VERSION WITH MARKINGS TO SHOW CHANGES MADE
APPENDIX B

(Ah), the battery weight w (kg), and the specific heat c of battery ($W/kg \cdot ^\circ C$) calculated with the above method based on the result of the test for measuring specific heat of battery, and subjected to the nail piercing test (internal short-circuiting test) according to the SBA Guideline. Table 3 also lists the test results.

{Table 3}

	$C/(w \cdot c)$	Situation after test	Evaluation
Example 7	0.015	Pressure release valve actuated; no burst nor firing	O good
Example 8	0.018	Pressure release valve actuated; no burst nor firing	O good
Example 9	0.03	Pressure release valve actuated; no burst nor firing	O good
Comparative Example 7	0.035	Pressure release valve actuated; burst and firing occurred	X no good

As listed in Table 3, in the case of examples 7-9 with $C/(w \cdot c)$ value of 0.03 or less, although the pressure release valve was activated, no significant change of shape was observed due to softening or melting of the battery case. However, in the case of comparative example 7 with $C/(w \cdot c)$ value of 0.035, the battery case was significantly deformed and partially cracked, and traces which were believed to indicate partial melting were observed. In addition, as for examples 7-9 and comparative example 7, when similar batteries were again produced, and subjected to the external short-circuiting test by short-circuiting the external terminal, there were provided the same results as the internal short-circuiting test shown in Table 3. From this, it was confirmed that the safety criteria prescribed in the SBA Guideline could be passed by making the $C/(w \cdot c)$ value 0.03 or less.

As described, according to the lithium secondary battery of the present invention, since it uses for the battery case aluminum which has lightweight and is excellent in conductivity, it has a very excellent advantage that the battery has light weight, and is significantly improved for the energy density than the prior art. Moreover, it is possible to provide a battery with excellent safety which can pass the criteria of SBA Guideline because the specific heat design of battery for the battery capacity and determination of shape of battery case are properly conducted.

**VERSION WITH MARKINGS TO SHOW CHANGES MADE
APPENDIX B**

Abstract of the Disclosure

A lithium secondary battery includes: a battery case, and an internal electrode body 1 contained in the battery case and including a positive electrode 2, a negative electrode 3, and a separator 4 made of porous polymer. The positive electrode and the negative electrode are wound and laminated through the separator so that the positive electrode and the negative electrode are not brought into direct contact with each other. The battery case is composed of pure aluminum or aluminum alloy in which one or more components selected from manganese, magnesium, silicon and copper is added in aluminum. The lithium secondary battery has high weight energy density, is superior in safety, and is used for, particularly, an electric vehicle.